


LINE PANEL

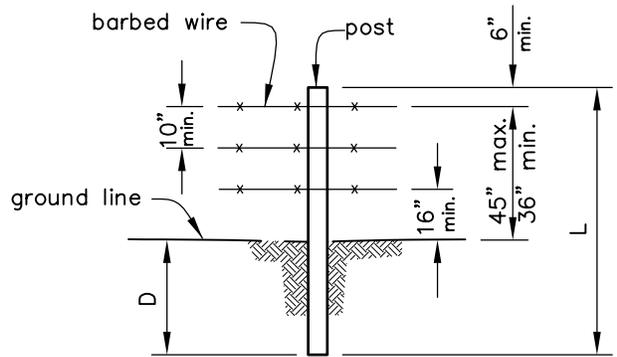

BARBED WIRE DETAIL

BARBED WIRE 12 1/2 gauge conventional or 15 1/2 gauge high-tension

2 twisted strands with 14 gauge or heavier two-point barbs on approx. 5 inch centers.

Class 1 (min. or equiv.) zinc-coating as per ASTM A-121.

LINE	Plastic:	L = 6 ft. min. D = 24 in. min. Dia. = 3-3/8 in. min.	Fiberglass:	L = 6 ft. min. D = 24 in. min. Dia. = 1-1/4 in. min.
	Wood:	L = 6 ft. min. D = 24 in. min. Dia. = 3 in. min.	Steel:	L = 5-1/2 ft. min. D = 18 in. min. Standard "T" or "U"; > 1.25 lbs/ft of length
CORNER OR GATE	Wood:	L = 7 ft. min. D = 3 ft. min. Dia. = 5 in. min.	Steel:	L = 7 ft. min. D = 3 ft. min. (set in conc.) Dia. = Round 2-3/8 in. O.D. or Angle iron 2-1/2 x 2-1/2 x 1/4 (in.)
	STAYS	Wood: 1-1/2 in. dia. min. of durable wood Fiberglass: Any manufactured for this purpose Wire: 9 1/2 gauge, zinc coated, twisted, manufactured for this purpose		

SPECIES for all wood: _____

SPECIAL INSTRUCTIONS

This drawing requires supporting technical documentation prior to use and must be adapted to the specific site.

Drawing not to scale.

Designed _____	Date _____	CAD FILE NAME OR_3BARBWIRE.DWG	3 STRAND BARBED WIRE FENCE
Drawn _____	2/2005	DRAWING NO.	
Checked _____	_____	SHEET OF _____	
Approved _____	_____	LIVESTOCK FACILITIES	
NRCS U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE			